

LUXPOWER® SERIES **N5**

585W Mono BIFACIAL DG
144 Half-Cell Layout
M10 N-TOPCon Cell



LECO N-TOPCon
Cell Technology



SMBB Half Cut
Cell Technology



Bifacial Cell
Module Technologies



Excellent
Anti-PID
Low LID
Performance




Less Hot Spot
Shading Effects



Higher Power Output
Lower BOS & LCOE

Linear performance Warranty

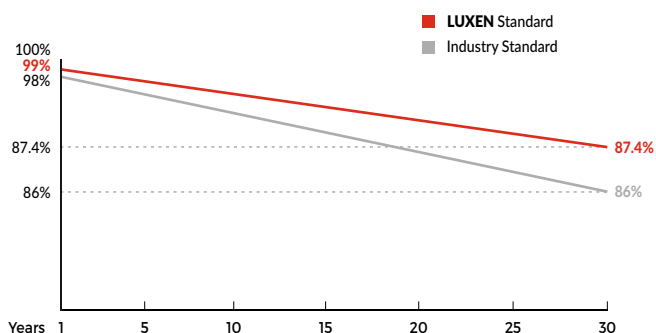

Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests



LUXEN SOLAR ENERGY CO., LTD.

Manufacturer: A301, Zhongyi Building, No.59 Wuzhong Avenue, Wuzhong District, Suzhou, 215168, China


Factory: No.1 Haiyue Road, Suxitong Industrial Park, Nantong, 226000, China

T: +86 512 6708 1572 | F: +86 512 6708 1570 | sales@luxensolar.com

www.luxensolar.com

MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2278 x 1134 x 30mm
Weight	31.5kg
Front Glass	2.0mm coated semi-tempered glass
Back Glass	2.0mm semi-tempered glass
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

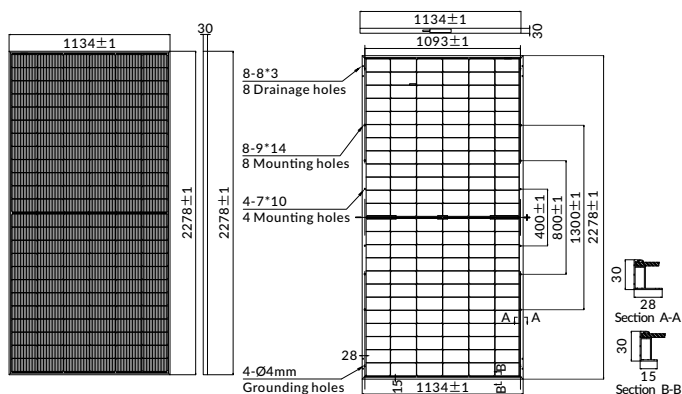

ELECTRICAL PARAMETERS

POWER CLASS	LNVU-585ND	
	STC	NMOT
Maximum power (Pmax)	585W	441W
Open Circuit Voltage (Voc)	51.81V	49.09V
Short Circuit Current (Isc)	14.36A	11.59A
Voltage at Maximum power (Vmpp)	42.86V	39.80V
Current Maximum Power (Impp)	13.65A	11.08A
MODULE EFFICIENCY (%)	22.60%	

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5GNMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G


BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum power (Pmax)	614W
	Module Efficiency STC (%)	23.78%
15%	Maximum power (Pmax)	673W
	Module Efficiency STC (%)	26.04%
25%	Maximum Power (Pmax)	731W
	Module Efficiency STC (%)	28.31%


PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	36	36
Pallets per container	5	20
Pieces per container	180	720

I-V CURVE

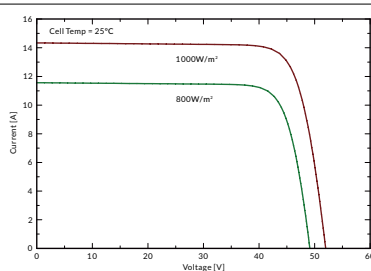

LNVU-585ND/I-V

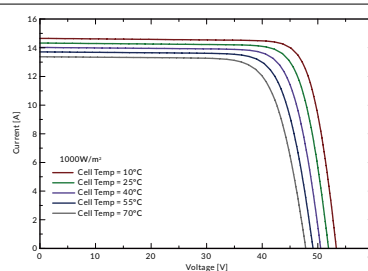

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. LUXEN SOLAR reserves the right to modify the information any time without prior notice.